NOTE: ALL FRENCH DOORS TO BE 1 LITE "PRAIRIE"

DOOR SCHEDULE

MARK	SIZE	THK	MTL	DESCRIPTION
1	(2)8-0x8-0	1-3/4	WOOD	1 LT. FRENCH W/ T-ASTRAGAL W/ HEAD & FOOT BOLTS - "PRAIRIE"
2	2-8x8-0	1-3/4	CLAD WOOD	1 LT. FRENCH W/ PANEL BELOW - "PRAIRIE"
3	2-8x8-0	1-3/4	METAL	2 PANEL, INSULATED
4	(2)2-8x8-0	1-3/4	CLAD WOOD	1 LT. FRENCH W/ T-ASTRAGAL W/ HEAD & FOOT BOLTS - "PRAIRIE"
5	3-0x8-0	1-3/4	FIBERGLASS	2 PANEL, INSULATED
6	(3)3-0x8-0	1-3/4	CLAD WOOD	1 LT. FRENCH SLIDING DOORS - "PRAIRIE"
7	3-0x8-0	1-3/4	WOOD	SCREEN DOOR W/ CLOSER
8	(2)2-8x8-0	1-3/4	WOOD	SCREEN DOOR W/ CLOSER
9	(2)3-0x8-0	1-3/4	CLAD WOOD	1 LT. FRENCH FIXED W/ T-ASTRAGAL - "PRAIRIE"
10	(2)3-0x8-0	1-3/4	CLAD WOOD	1 LT. FRENCH W/ T-ASTRAGAL W/ HEAD & FOOT BOLTS - "PRAIRIE"
11	2-8x8-0	1-3/4	CLAD WOOD	1 LT. FRENCH - "PRAIRIE"
12	3-0x8-0	1-3/8	HRD. BD.	2 PANEL
13	2-8x8-0	1-3/8	HRD. BD.	2 PANEL
14	2-6x8-0	1-3/8	HRD. BD.	2 PANEL
15	2-4x8-0	1-3/8	HRD. BD.	2 PANEL
16	2-0x8-0	1-3/8	HRD. BD.	2 PANEL
17	3-0x8-0	1-3/8	HRD. BD.	SLIDING BARN DOOR
18	2-8x8-0	1-3/8	METAL	METAL SAFE DOOR - VERIFY W/ OWNER
19	(2)3-0x8-0	1-3/8	HRD. BD.	SLIDING BARN DOOR
20	(2)2-0x8-0	1-3/8	HRD. BD.	2 PANEL W/ ROLLER CATCHES
21	(2)1-4x8-0	1-3/8	HRD. BD.	2 PANEL W/ ROLLER CATCHES
22	3-0x8-0	1-3/8	HRD. BD.	2 PANEL POCKET DOOR
23	(2)2-0x8-0	1-3/8	HRD. BD.	2 PANEL POCKET DOOR
24	2-4x6-0	---	GLASS	TEMPERED GLASS SHOWER DOOR
25	20-0x8-0	1-3/4	METAL	OVER HEAD "CARRIAGE STYLE" GARAGE DOOR - SEL. BY OWNER
26	10-0x8-0	1-3/4	METAL	OVER HEAD "CARRIAGE STYLE" GARAGE DOOR - SEL. BY OWNER
27	3-0x8-0	---	C.Y.P.	CASED OPENING
28	2-8x8-0	3-1/2	C.Y.P.	CASED OPENING
29	2-4x8-0	3-1/2	C.Y.P.	CASED OPENING
30	3-0x8-0	1-3/4	CLAD WOOD	1 LT. FRENCH - "PRAIRIE"
31	2-4x8-0	1-3/8	HRD. BD.	2 PANEL POCKET DOOR

NOTE: VERIFY DOOR SIZE, HEADER, MATERIAL AND FINISH PRIOR TO ORDERING UNITS. ALL HARD BD. DOORS TO BE SOLID CORE.

NOTE: ALL WINDOWS TO BE VINYL "PRAIRIE"

WINDOW SCHEDULE

MARK	SIZE	DESCRIPTION	LTS.	GLAZING	HDR. (AFF)
A	2-0x4-0	VINYL FIXED - "PRAIRIE"	4	LOW "E"	8-0
B	(2)2-8x6-0	VINYL CASEMENT - "PRAIRIE"	6	LOW "E"	8-0
C	2-0x5-0	VINYL FIXED - "PRAIRIE"	3	LOW "E"	8-0
D	2-8x6-0	VINYL FIXED - "PRAIRIE"	6	LOW "E"	10-0
E	3-0x6-0	VINYL FIXED - "PRAIRIE"	6	LOW "E"	8-0
F	5-0x6-0	VINYL FIXED - "PRAIRIE"	9	LOW "E"	8-0
G	(3)3-0x4-0	VINYL SLIDING - "PRAIRIE" PASS-THRU - SEE PLAN	4	LOW "E"	8-0
H	2-8x4-0	VINYL CASEMENT - "PRAIRIE"	6	LOW "E"	8-0
J	2-8x6-0	VINYL CASEMENT - "PRAIRIE"	6	LOW "E"	8-0
K	4-0x2-0	VINYL TRANSOM - "PRAIRIE"	6	LOW "E"	8-0
L	5-0x5-0	VINYL FIXED - "PRAIRIE"	9	LOW "E"	8-0
M	2-8x2-8	VINYL TRANSOM - "PRAIRIE"	4	LOW "E"	8-0
N	OMITTED				
P	2-8x6-0	VINYL FIXED - "PRAIRIE"	6	LOW "E"	20-6
Q	2-8x6-0	VINYL FIXED - "PRAIRIE"	6	LOW "E"	15-3
R	(2)2-8x6-0	VINYL FIXED - "PRAIRIE"	6	LOW "E"	7-0
S	2-8x6-0	VINYL FIXED - "PRAIRIE"	6	LOW "E"	7-0
T	2-0x5-0	VINYL FIXED - "PRAIRIE"	4	LOW "E"	7-0
U	(2)2-8x5-0	VINYL CASEMENT - "PRAIRIE"	4	LOW "E"	7-0
V	2-0x2-0	VINYL TRANSOM - "PRAIRIE"	4	LOW "E"	17-6
W	(2)2-0x2-0	VINYL TRANSOM - "PRAIRIE"	4	LOW "E"	16-10+/-
X	2-0x2-0	VINYL TRANSOM - "PRAIRIE"	4	LOW "E"	16-10+/-

NOTE:
VERIFY SIZE, GLAZING, LITE DIVISION AND HEADER PRIOR TO ORDERING UNITS.

FLOOR PLAN GENERAL NOTES:

- ALL 1st FLOOR CEILINGS TO BE 12'-1 1/8", UNLESS OTHERWISE NOTED.
- ALL 2nd FLOOR CEILINGS TO BE 9'-1 1/8", UNLESS OTHERWISE NOTED.
- TYPICAL WOOD STUD WALLS: 2X4'S @ 16" O.C. TO MAXIMUM HEIGHT OF 10' SUPPORTING ONE FLOOR, ROOF AND CEILING. UNSUPPORTED AND UNBRACED WALL HEIGHTS EXCEEDING 10' REQUIRE STRUCTURAL ANALYSIS BY ENGINEER TO DETERMINE STUD SIZE AND SPACING.
- ALL BEAMS TO (2) 2 X 12 #2 YELLOW PINE BEAMS, UNLESS OTHERWISE NOTED. VERIFY "FLUSH" OR "BOXED" ON PLAN. "FLUSH" BEAM INDICATES BEAM THAT OCCURS ABOVE LEVEL OF CEILING AND UTILIZES METAL JOIST HANGERS FOR STRUCTURAL ATTACHMENTS. "BOXED" BEAM INDICATES BEAM THAT OCCURS BELOW LEVEL OF CEILING AND IS WRAPPED IN SHEET ROCK OR 1X TRIM AND MOLDING - VERIFY.
- REFER TO HEADER SCHEDULE FOR SIZES OF TYPICAL INTERIOR/EXTERIOR DOOR AND WINDOW HEADERS.
- ALL A/C UNITS AND W/H IN ATTIC TO BE LOCATED IN G.I. SAFETY PANS W/ DRAIN TO SOFFIT, UNLESS OTHERWISE NOTED.
- ALL A/C UNITS AND W/H IN ATTIC TO BE ACCESSIBLE BY A 24" WIDE PLYWOOD CATWALK. PROVIDE A 30" WIDE PLYWOOD PLATFORM AROUND ALL UNITS.
- VENT DRYERS ACCORDING TO "GAMA"; MAX. LENGTH OF DRYER VENTS TO BE 25' (ALLOW 5' PER 90° ELBOW).
- SLOPE SLAB 1" AT ALL PORCHES, COVERED TERRACES AND OUTDOOR BALCONIES; SLOPE SLAB 2" AT GARAGES.

FLOOR PLAN SYMBOL LEGEND:

- H.B. = HOSE BIB, FAUCET
- WTR = WATER CONNECTION
- R/S = # OF RODS / # OF SHELVES
- R/A = RETURN AIR CHASE
- GAS = GAS CONNECTION
- = REFERENCE CABINET ELEVATIONS
- = LOG LIGHTER & KEY
- = SECTION OR DETAIL, LABEL & PAGE #
- SLOPE 2" = SLOPE OF FLOOR
- 2x? @ ? "O.C." = SIZE OF FLOOR OR CEILING JOIST ABOVE W/ SPACING

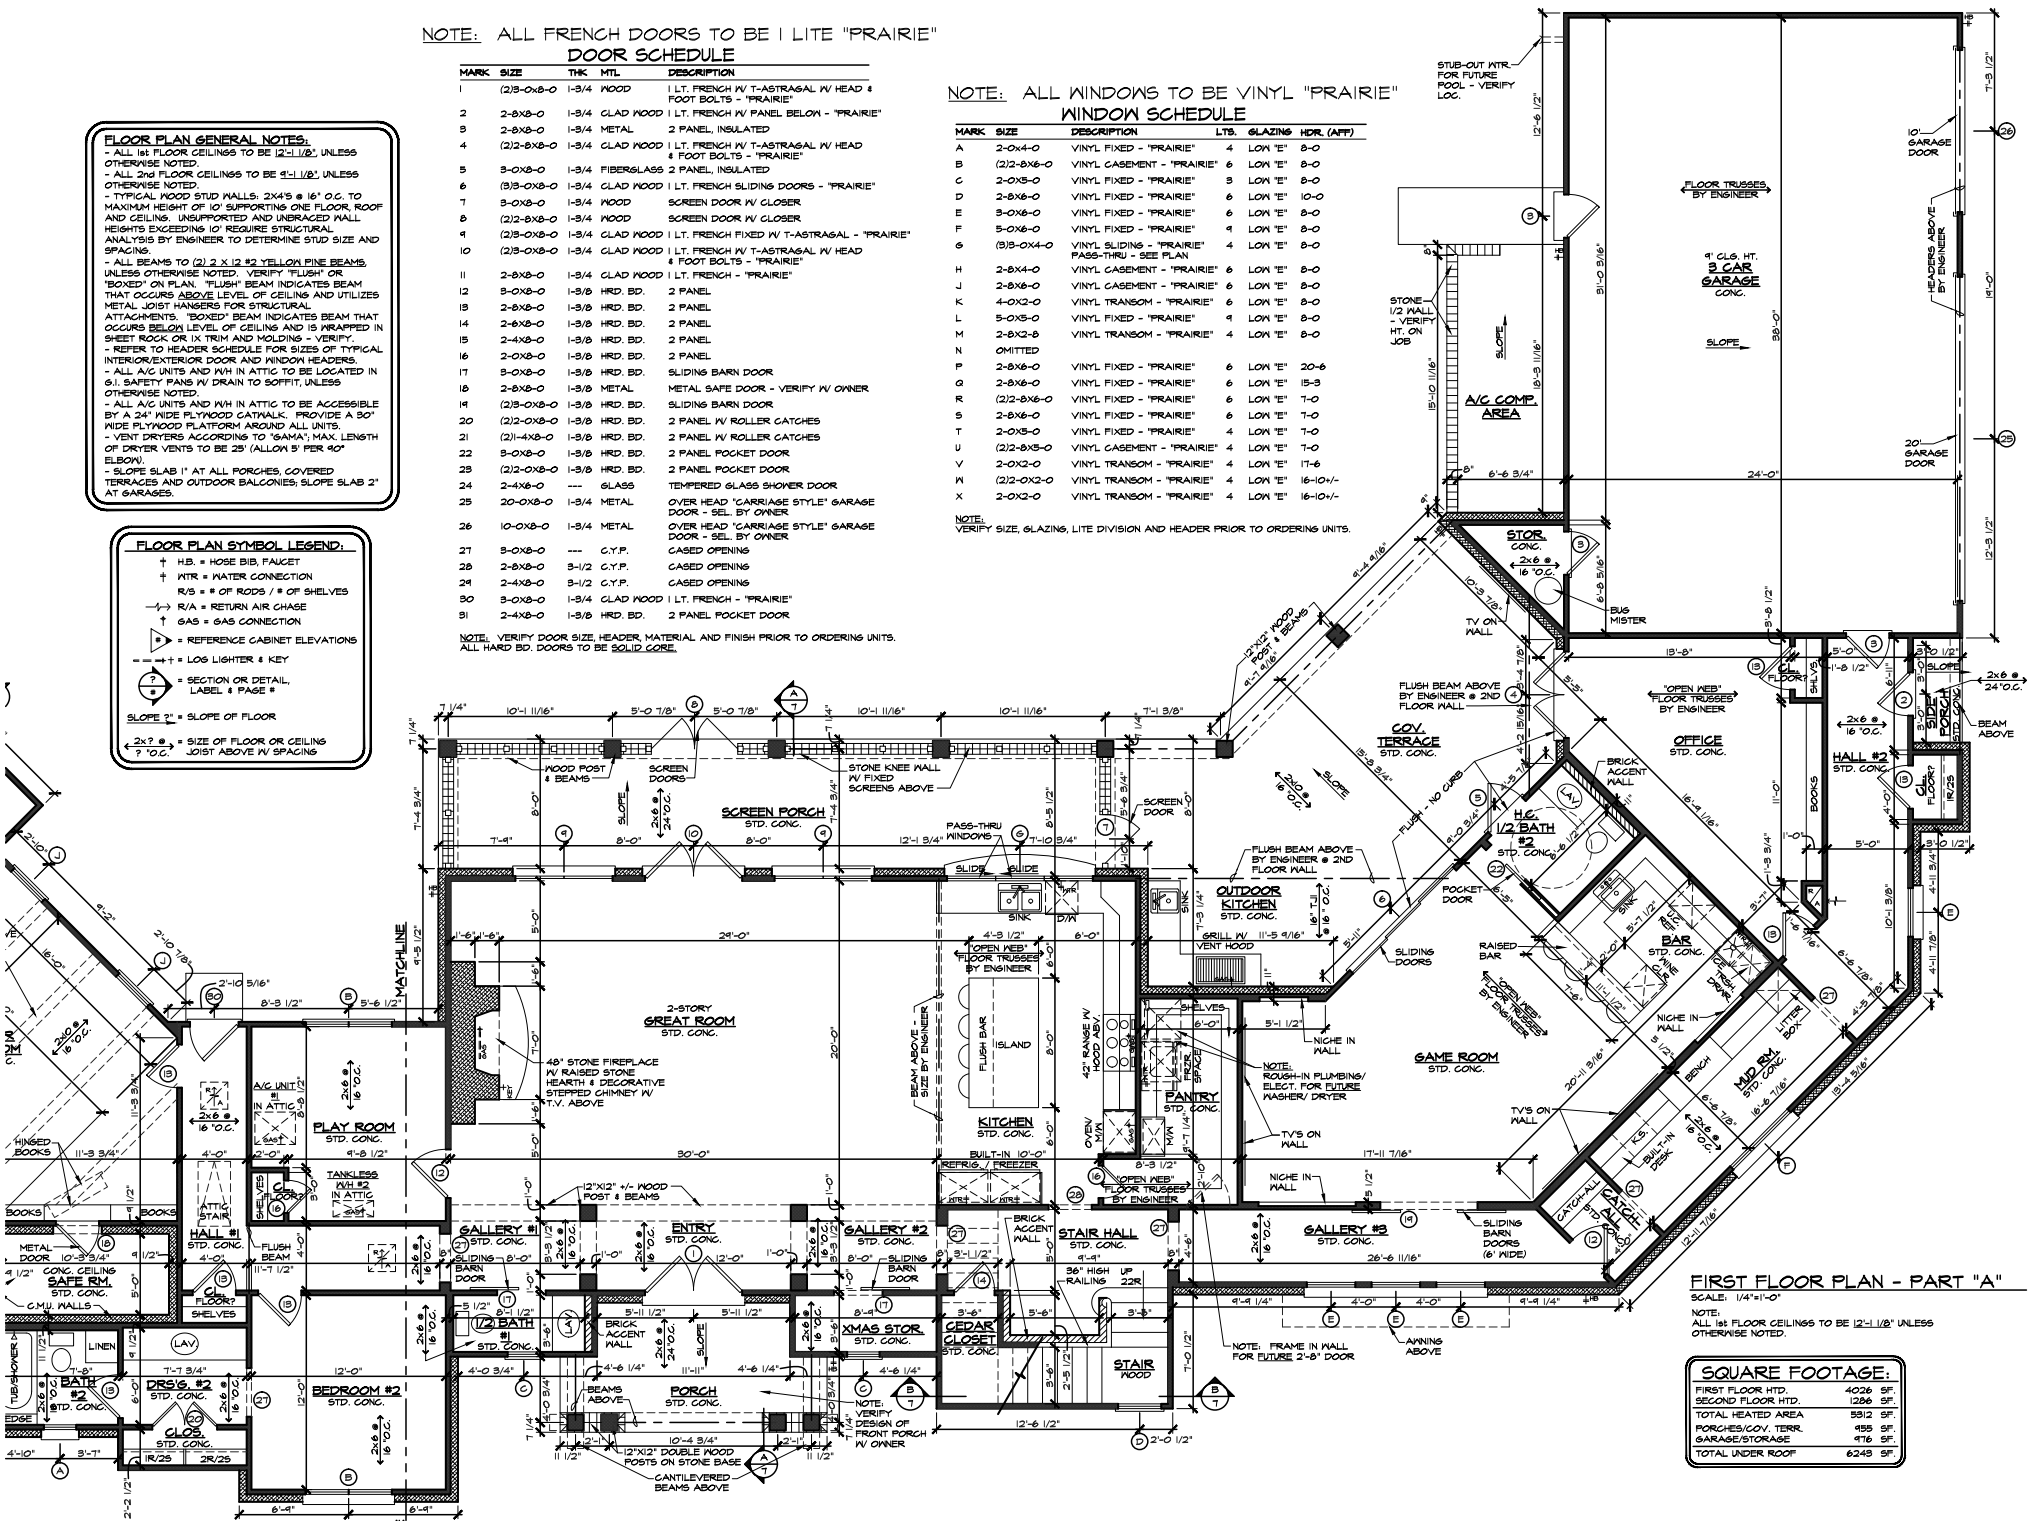

FIRST FLOOR PLAN - PART "A"

SCALE: 1/4"=1'-0"

NOTE:
ALL 1st FLOOR CEILINGS TO BE 12'-1 1/8" UNLESS OTHERWISE NOTED.

SQUARE FOOTAGE:

FIRST FLOOR HTD.	4026 SF.
SECOND FLOOR HTD.	1286 SF.
TOTAL HEATED AREA	5312 SF.
PORCHES/COV. TERR.	455 SF.
GARAGE/STORAGE	476 SF.
TOTAL UNDER ROOF	6243 SF.