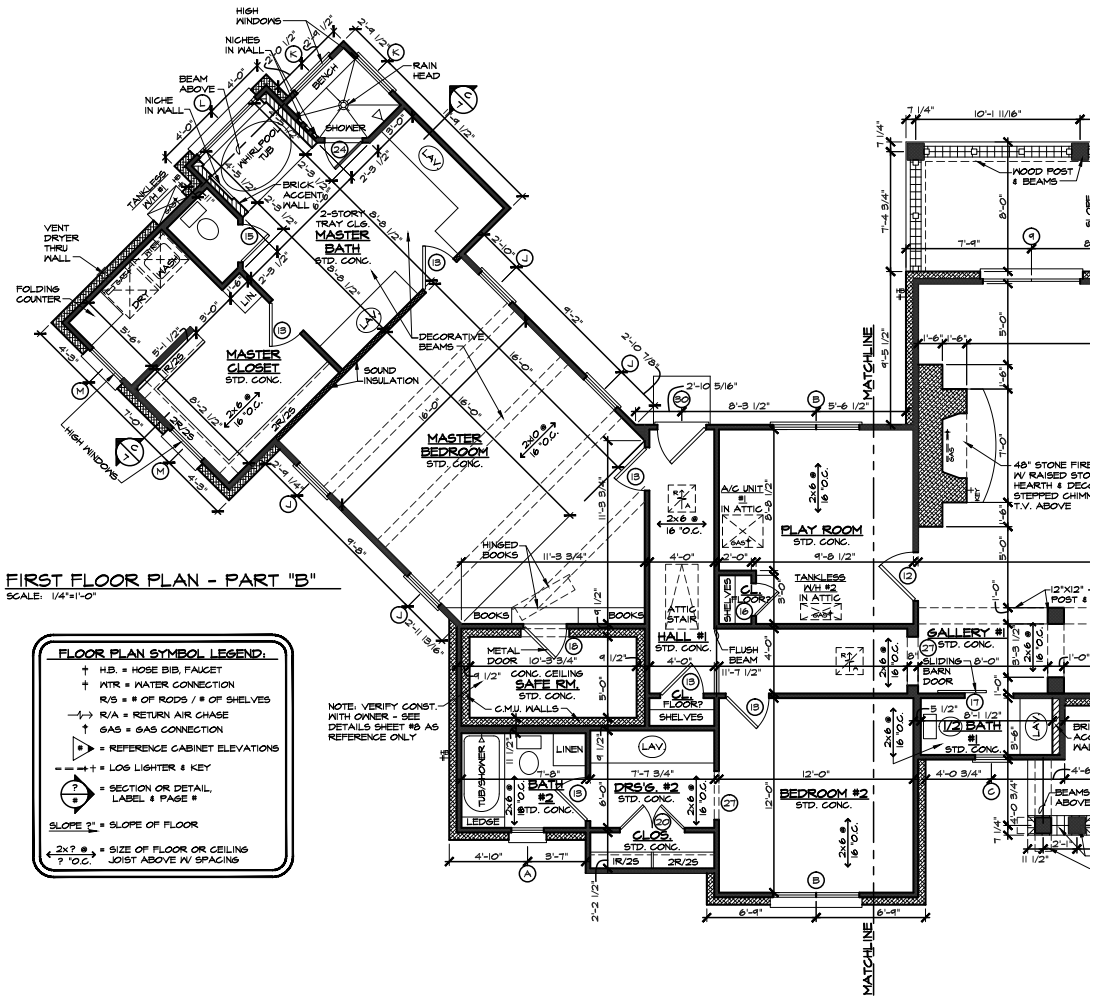

FIRST FLOOR PLAN - PART "B"

SCALE: 1/4"=1'-0"

FLOOR PLAN SYMBOL LEGEND:

- H.B. = HOSE BIB, FAUCET
- WTR = WATER CONNECTION
- R/S = # OF RODS / # OF SHELVES
- R/A = RETURN AIR CHASE
- GAS = GAS CONNECTION
- = REFERENCE CABINET ELEVATIONS
- = LOG LIGHTER & KEY
- = SECTION OR DETAIL, LABEL & PAGE #
- SLOPE 2" = SLOPE OF FLOOR
- 2X? @ ? "O.C." = SIZE OF FLOOR OR CEILING JOIST ABOVE W/ SPACING

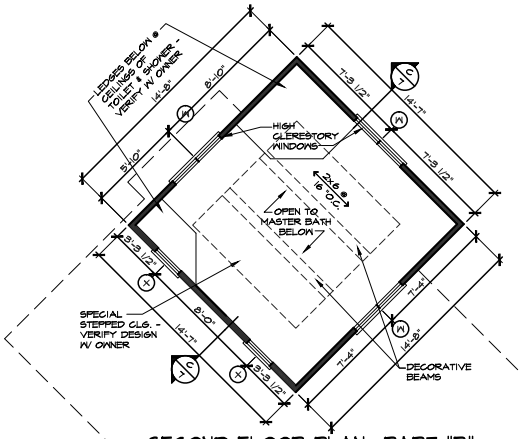

SECOND FLOOR PLAN -PART "B"

SCALE: 1/4"=1'-0"

FLOOR PLAN GENERAL NOTES:

- ALL 1st FLOOR CEILINGS TO BE 12'-1 1/8", UNLESS OTHERWISE NOTED.
- ALL 2nd FLOOR CEILINGS TO BE 9'-1 1/8", UNLESS OTHERWISE NOTED.
- TYPICAL WOOD STUD WALLS: 2X4'S @ 16" O.C. TO MAXIMUM HEIGHT OF 10' SUPPORTING ONE FLOOR, ROOF AND CEILING. UNSUPPORTED AND UNBRACED WALL HEIGHTS EXCEEDING 10' REQUIRE STRUCTURAL ANALYSIS BY ENGINEER TO DETERMINE STUD SIZE AND SPACING.
- ALL BEAMS TO (2) 2 X 12 #2 YELLOW PINE BEAMS, UNLESS OTHERWISE NOTED. VERIFY "FLUSH" OR "BOXED" ON PLAN. "FLUSH" BEAM INDICATES BEAM THAT OCCURS ABOVE LEVEL OF CEILING AND UTILIZES METAL JOIST HANGERS FOR STRUCTURAL ATTACHMENTS. "BOXED" BEAM INDICATES BEAM THAT OCCURS BELOW LEVEL OF CEILING AND IS WRAPPED IN SHEET ROCK OR 1X TRIM AND MOLDING - VERIFY.
- REFER TO HEADER SCHEDULE FOR SIZES OF TYPICAL INTERIOR/EXTERIOR DOOR AND WINDOW HEADERS.
- ALL A/C UNITS AND W/H IN ATTIC TO BE LOCATED IN G.I. SAFETY PANS W/ DRAIN TO SOFFIT, UNLESS OTHERWISE NOTED.
- ALL A/C UNITS AND W/H IN ATTIC TO BE ACCESSIBLE BY A 24" WIDE PLYWOOD CATWALK. PROVIDE A 30" WIDE PLYWOOD PLATFORM AROUND ALL UNITS.
- VENT DRYERS ACCORDING TO "GAMA", MAX. LENGTH OF DRYER VENTS TO BE 25' (ALLOW 5' PER 90° ELBOW).
- SLOPE SLAB 1" AT ALL PORCHES, COVERED TERRACES AND OUTDOOR BALCONIES; SLOPE SLAB 2" AT GARAGES.

MATCHLINE

MATCHLINE