


TYPICAL CHIMNEY HEIGHTS

NOT TO SCALE

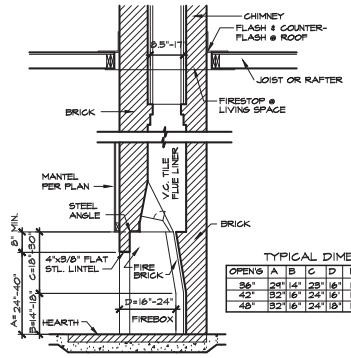


TYPICAL DIMEN.

| OPEN'G | A | B | C | D | FLUE |
|---|---|---|---|---|---|
| 36" | 24" | 14" | 28" | 16" | 12" X 12" |
| 42" | 32" | 16" | 24" | 16" | 16" X 16" |
| 48" | 32" | 16" | 24" | 18" | 16" X 16" |

TYPICAL MASONRY FIREPLACE

NOT TO SCALE

**MINIMUM INTERIOR DOOR/FIREPLACE HEADER SCHEDULE:**
(UNLESS OTHERWISE NOTED)

(2) - 2X6 FOR SPAN 2'-0" TO 6'-0"
(2) - 2X8 FOR SPAN 6'-0" TO 8'-0"
(2) - 2X12 FOR SPAN 8'-0" TO 10'-0"

+ 12'-0" REQUIRES SPECIAL BEAM SIZE PROVIDED BY ENGINEER
INSTALL 1/2" PLYWOOD FLITCH PLATE BETWEEN 2X'S - TYPICAL
HEADER TO BEAR ON SINGLE HEADER STUD FOR SPAN OF 36" OR LESS
HEADER TO BEAR ON DOUBLE HEADER STUD FOR SPAN OVER 36'

**MINIMUM EXTERIOR DOOR/WINDOW HEADER SCHEDULE**
(UNLESS OTHERWISE NOTED)

(2) - 2X12 FOR SPAN 2'-0" TO 10'-0"

+ 10'-0" REQUIRES SPECIAL BEAM SIZE PROVIDED BY ENGINEER
INSTALL 1/2" PLYWOOD FLITCH PLATE BETWEEN 2X'S - TYPICAL
HEADER TO BEAR ON SINGLE HEADER STUD FOR SPAN OF 36" OR LESS
HEADER TO BEAR ON DOUBLE HEADER STUD FOR SPAN OVER 36'

**SECTION NOTES:**
SECTIONS AND DETAILS ARE INTENDED FOR SCHEMATIC PURPOSES ONLY, IN ORDER TO CONVEY DESIGN INTENT. CONTRACTOR TO REFER TO SPECIFICATIONS, SCHEDULES AND DETAILS BY ENGINEER FOR SPECIFIC CONSTRUCTION INFORMATION. CONTRACTOR TO VERIFY JOIST SPACING & SPAN W/ MECHANICAL & PLUMBING CONTRACTORS PRIOR TO FRAMING - ENGINEER TO VERIFY ALL STRUCTURAL BEAMS & LOAD BEARING WALL SIZE.

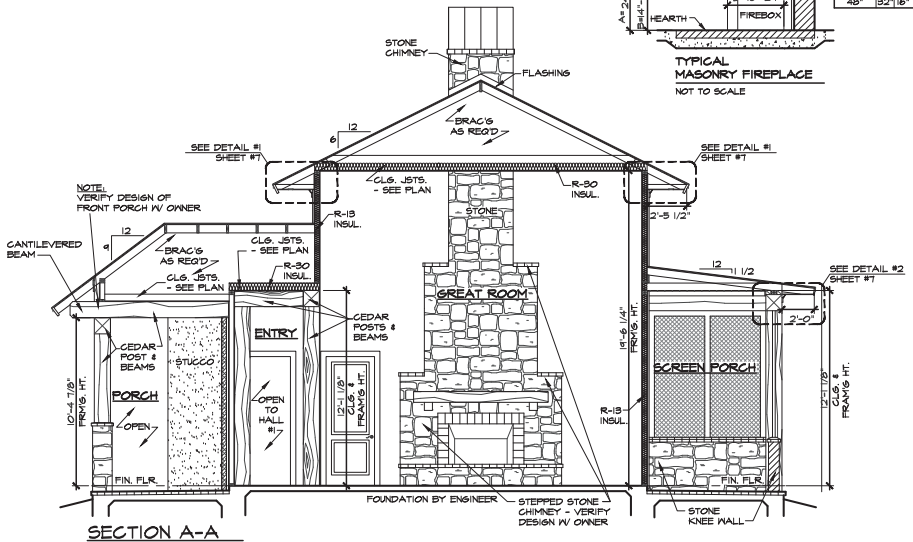


SECTION A-A

SCALE: 1/4"= 1'-0"

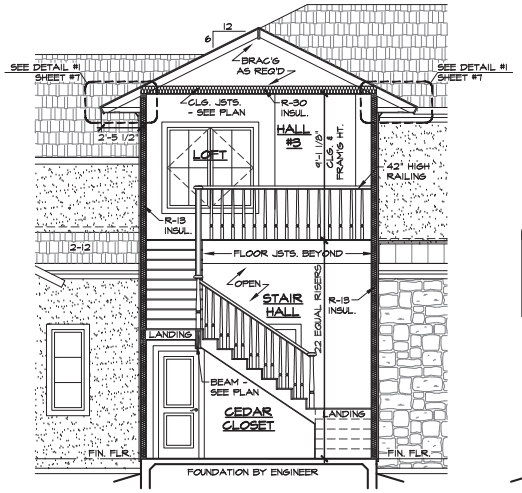


SECTION B-B

SCALE: 1/4"= 1'-0"

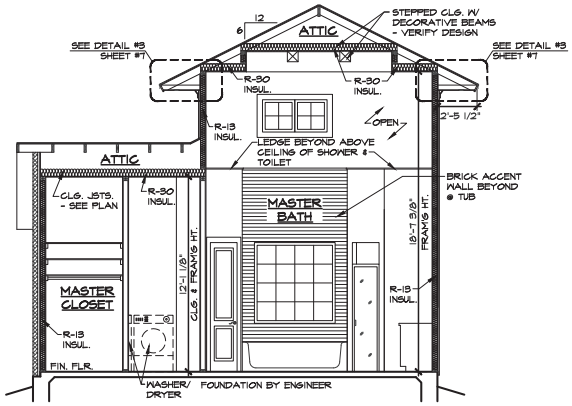


SECTION C-C

SCALE: 1/4"= 1'-0"

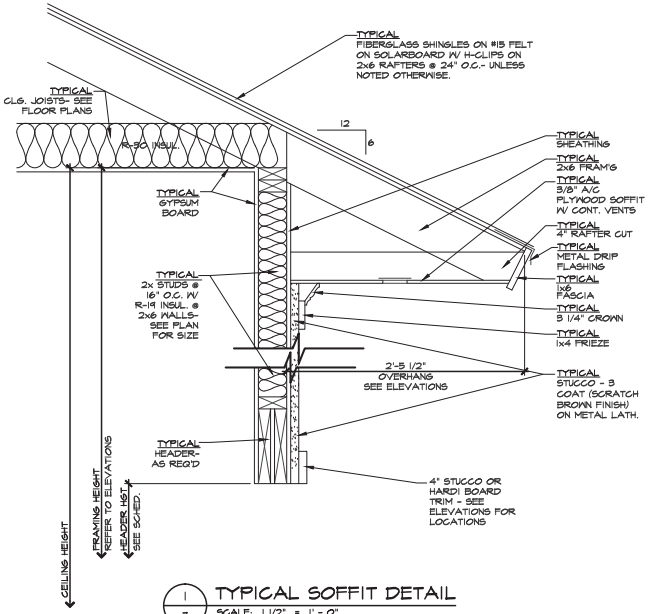


1/7 TYPICAL SOFFIT DETAIL

SCALE: 1 1/2" = 1' - 0"

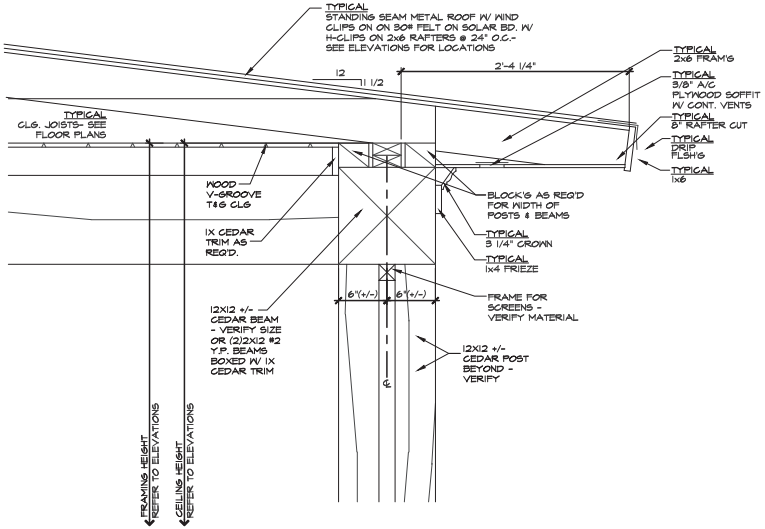


2/7 SOFFIT DETAIL @ SCREEN PORCH

SCALE: 1 1/2" = 1' - 0"

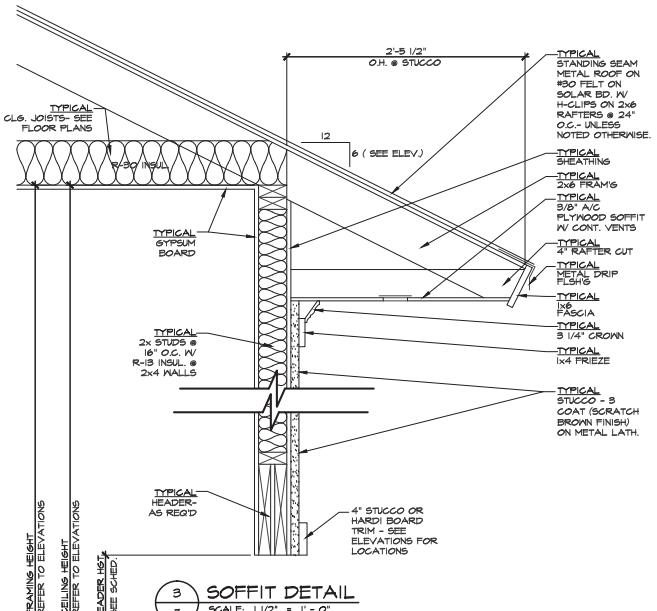


3/7 SOFFIT DETAIL

SCALE: 1 1/2" = 1' - 0"